

## Fast Charge Deep Cycle Lead-Carbon Battery

## HDC12-65

HDC series lead-carbon batteries use functional activated carbon and graphene as carbon materials, which are added to the negative plate of the battery to make lead carbon batteries have the advantages of both lead-acid batteries and super capacitors. It not only improves the ability of rapid charge and discharge, but also greatly prolongs the battery life. It is more suitable for the application of PSOC.

12V  
65Ah

Lead Carbon  
Technology

Deep  
Cycle



### COMPLIED STANDARDS

IEC 60869-21-22 JIS C8704 YD/T799  
BS6290 part4 GB/T 19638 UL 1989



### General Features

- ✓ Combinethe characteristics of lead acid battery and super capacitor
- ✓ Longlife cycle service design, excellent PSoc and cyclic performance
- ✓ Highpower, rapid charging and discharging
- ✓ Uniquegridand lead pasting design
- ✓ Extremetemperaturetolerance
- ✓ Abletooperate at - 30°C + 60°C
- ✓ DeepDischarge recovery capability



### Applications

- Home Energy storage system
- Smart Power grid system
- Solar & Wind Power system
- Wheel chair, Golf Car
- Telecom systems
- BTS Stations
- Micro-grid system

### Technical Specifications

### Dimensions & Weigh

Length(mm)	350±1
Width(mm)	167±1
Height(mm)	178±1
Total Height(mm)	178±1
Weight(kg)	23.0±3%

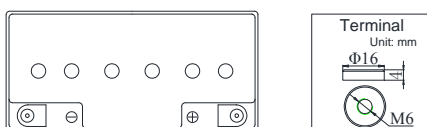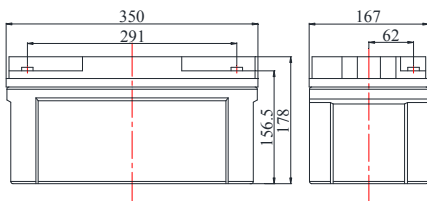

Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		20 Years
Nominal Capacity @25°C(20 hour rate@3.00A,10.50V)		65.0Ah
Capacity @25°C	10 hour rate (5.57A,10.8V)	60.7Ah
	5 hour rate (10.3A,10.5V)	55.5Ah
	1 hour rate (36.1A,9.60V)	41.1Ah
Internal Resistance	Full Charged Battery@25°C	≤8.8mΩ
Ambient Temperature	Discharge	-30°C~60°C
	Charge	-30°C~60°C
	Storage	-30°C~60°C
Max. Discharge Current@25°C		600A(5s)
Capacity affected by Temperature (10 hr Capacity )	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 18.0A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 18.0A Voltage 14.4-14.7V

### Battery Discharge Table

#### Discharge Constant Current per Cell(Ampers at 25 °C)







F.V/Time	5min	10min	15min	20min	25min	30min	35min	40min	45min	60min	90min	2h	3h	4h	5h	6h	7h	8h	10h	12h	20h
1.60V	163.2	104.0	88.4	72.0	63.4	56.5	49.9	45.3	41.5	36.1	29.1	22.9	16.1	13.2	10.9	9.2	8.1	7.2	6.11	5.14	3.18
1.65V	160.2	102.1	86.8	70.8	62.4	55.5	48.9	44.5	40.7	35.4	28.6	22.5	15.8	12.9	10.7	9.0	7.9	7.1	6.00	5.05	3.12
1.67V	158.6	101.1	85.8	69.7	61.8	55.0	48.7	44.3	40.5	35.1	28.4	22.3	15.6	12.8	10.6	8.9	7.9	7.0	5.94	5.01	3.09
1.70V	155.4	99.3	84.2	68.4	60.6	53.9	47.9	43.5	39.8	34.3	27.8	22.1	15.5	12.7	10.5	8.8	7.8	6.9	5.81	4.93	3.07
1.75V	154.2	98.3	83.6	67.6	59.7	53.4	47.2	42.9	39.3	34.0	27.5	21.6	15.2	12.5	10.3	8.7	7.7	6.8	5.75	4.85	3.00
1.80V	149.3	95.1	80.7	66.1	57.9	51.7	45.8	41.7	38.1	32.9	26.7	20.8	14.6	11.9	9.9	8.4	7.3	6.6	5.57	4.69	2.91

#### Discharge Constant Power per Cell(Watts at 25 °C)

F.V/Time	5min	10min	15min	20min	25min	30min	35min	40min	45min	60min	90min	2h	3h	4h	5h	6h	7h	8h	10h	12h	20h
1.60V	305.7	196.1	166.7	136.4	120.7	107.9	95.3	86.9	79.5	69.3	55.8	44.0	30.9	25.3	20.9	17.5	15.5	13.8	11.7	9.9	6.18
1.65V	301.3	193.2	164.6	134.7	119.1	106.4	93.6	85.1	78.3	68.0	54.9	43.2	30.4	24.9	20.6	17.2	15.3	13.6	11.5	9.7	6.12
1.67V	299.2	191.6	163.1	133.4	118.1	105.5	93.1	84.9	77.9	67.3	54.5	42.8	30.1	24.6	20.4	17.1	15.1	13.5	11.4	9.7	6.09
1.70V	296.4	188.8	160.5	130.9	116.0	103.4	91.8	83.5	76.7	66.1	53.4	42.5	29.8	24.3	20.3	17.0	15.0	13.4	11.2	9.5	6.06
1.75V	294.9	187.3	159.4	129.2	114.3	102.5	90.6	82.5	75.5	65.4	52.8	41.6	29.2	24.0	19.9	16.7	14.7	13.1	11.1	9.4	5.94
1.80V	286.2	182.0	154.6	126.8	111.3	99.3	88.0	80.3	73.3	63.4	51.2	40.1	28.1	22.9	19.2	16.1	14.1	12.6	10.7	9.1	5.76

**Note:** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSBattery** for the latest information.

### Performance Characteristics

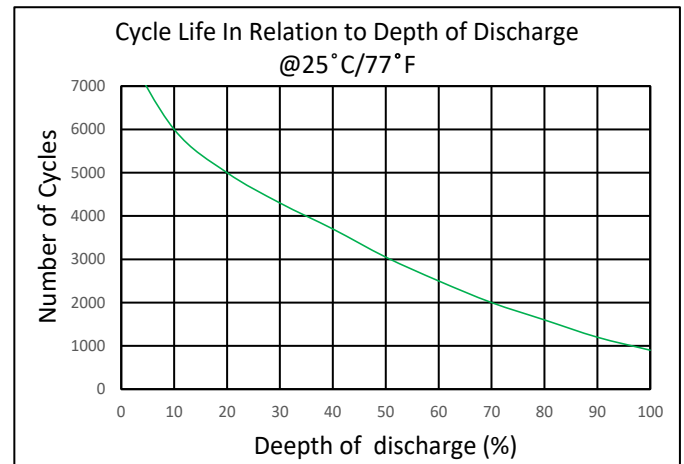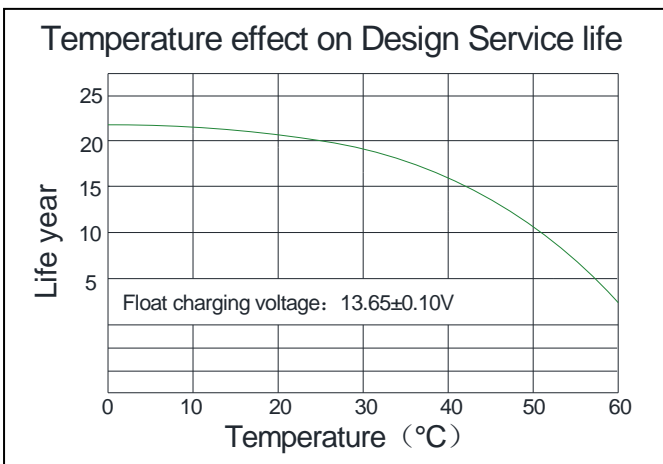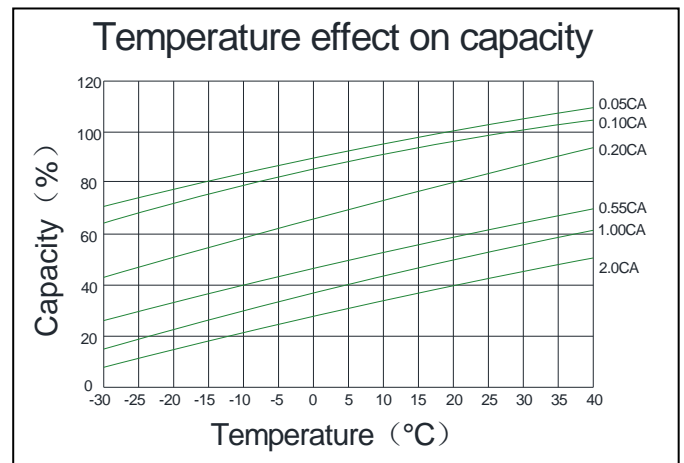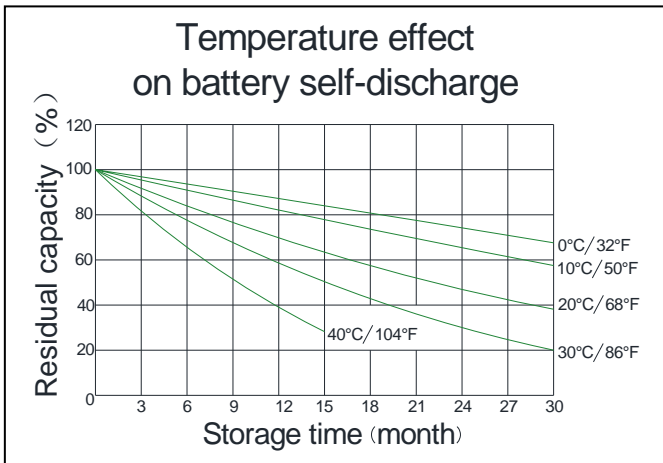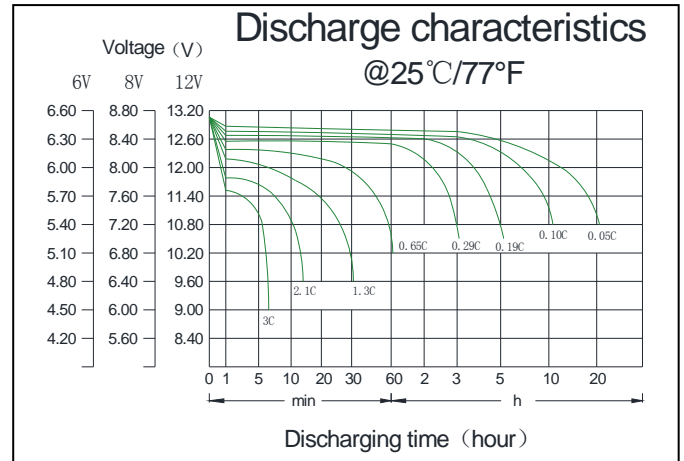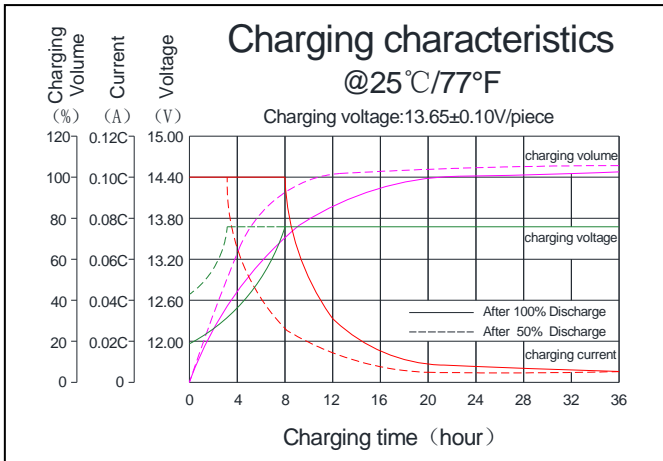

### Battery Discharge Capacity

Long time discharge capacity for Offer Grid solar/wind application						
Capacity	C20(Ah)	C48(Ah)	C72(Ah)	C100(Ah)	C120(Ah)	C240(Ah)
Model	F.V=1.75VPC					
HDC12-65	65.00	61.60	63.20	222.00	66.54	68.28

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.

Tel: +86-755-29123661 Email: Sales@CSBattery.cn, Support@CSBattery.cn

Website: www.CSBattery.cn